THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
V1B2B2Q0A30AHA0	6.1kg (13.55lbs)

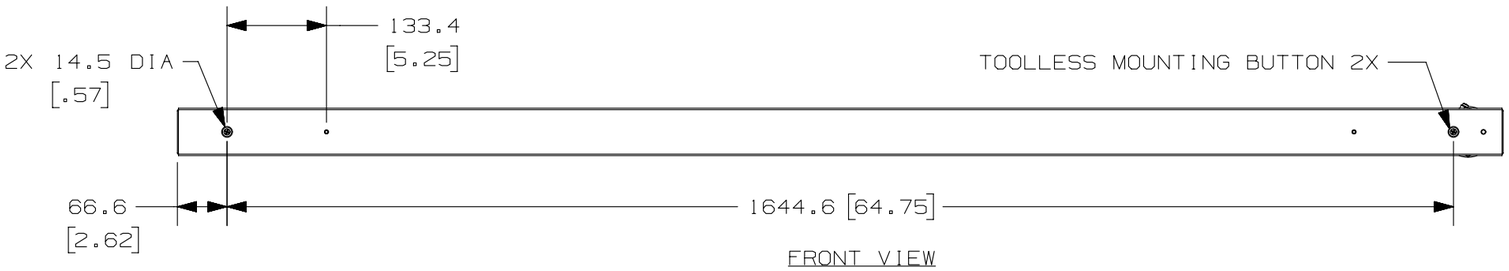

FRONT VIEW

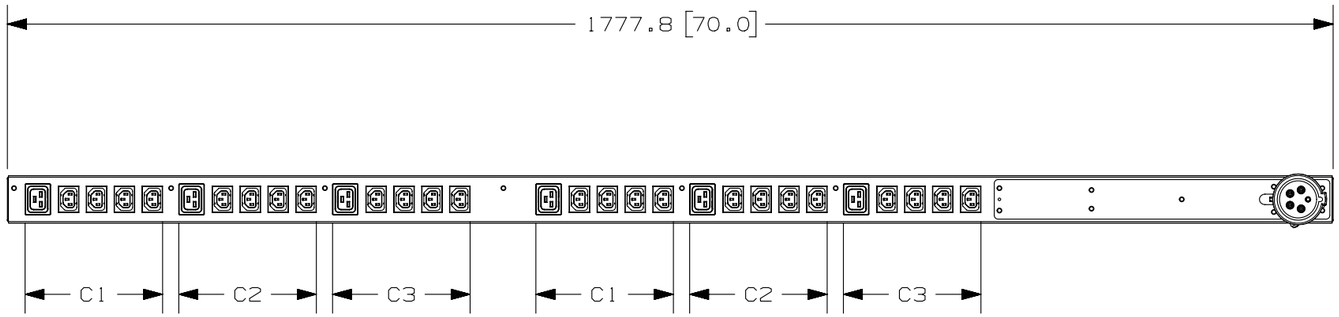

REAR VIEW

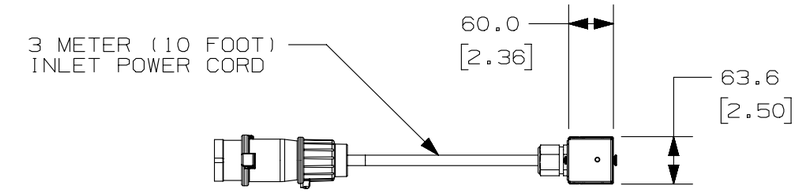

SIDE VIEW

NOTES:
1. IDENTIFICATION: VERTICAL, MIXED (24) C13 & (6) C19, BASIC 230/400V / 16A / THREE-PHASE WYE PDU

PART NO.	COLOR
V1B2B2Q0A30AHA0	BLACK

2. ACCESSORY COMPONENTS: (1) QUICK-START GUIDE
3. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
4. RoHS COMPLIANT.
5. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
6. MAXIMUM AVAILABLE INPUT POWER = 11.1 kW
7. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
8 PRINTED WITH PHASE & CIRCUIT IDENTIFICATION.



PLUG
16 AMP, 230/400V x 3-WYE
4P/5W
IEC 60309, SPLASHPROOF



TWENTY-FOUR (24)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13



SIX (6)
RECEPTACLES
16 AMP, 230V
STRAIGHT BLADE
IEC 60320/C19

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	09-19-14	SAT	MRWA	EDM	RELEASED TO PRODUCTION	12V091ZC-DC

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATUTE BOX.

THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN

DATE

PRINT

TITLE

BASIC PDU (24) C13 & (6) C19

CUSTOMER DRAWING

ITEM REVISION NAME: 12V091ZC/00

DATASET FILE NAME: 12V091ZC_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		METRIC - MILLIMETER		ANGLE
X.X	+/- 0.03	X.	+/- 0.8	+/- 1°
X.XX	+/- 0.018	X.X	+/- 0.46	
X.XXX	+/- 0.007	X.XX	+/- 0.18	

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: 12V091ZC-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
SAT	09-11-14	MRWA	NONE	B

SHT 1 OF 1